


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

ASSEMBLY INSTRUCTION MODEL #50140SCLMWP

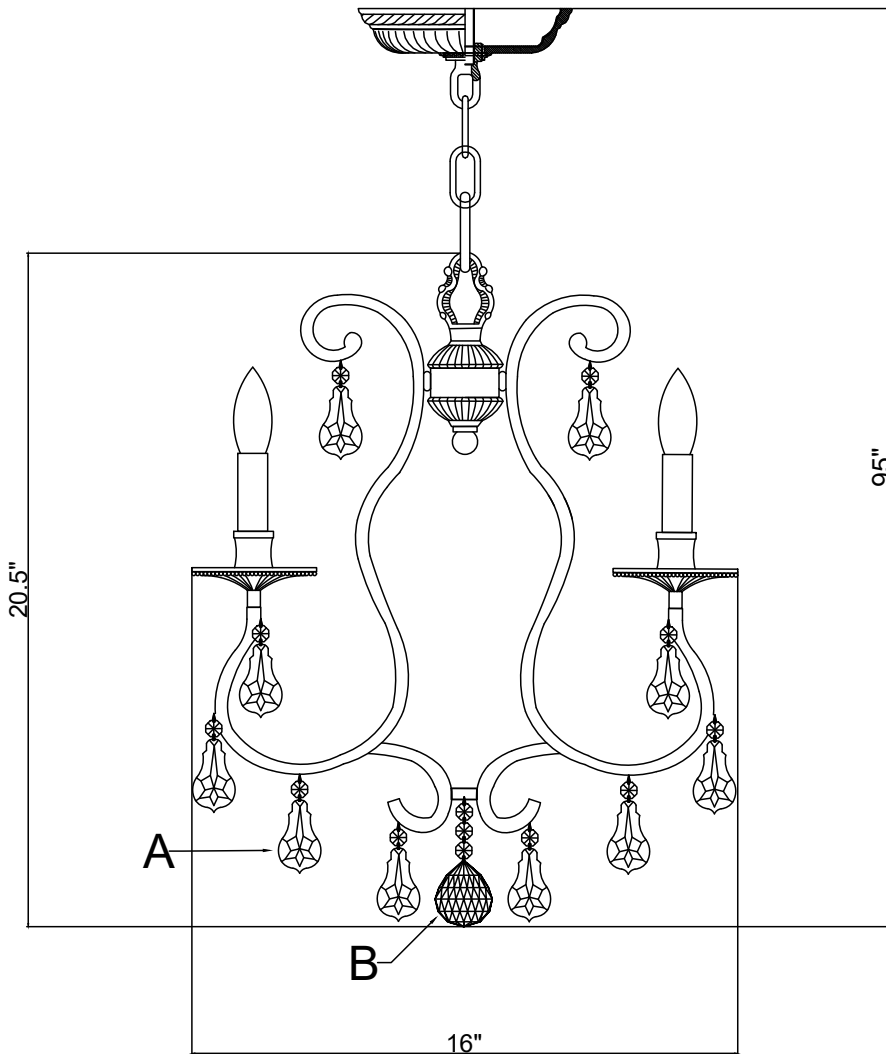

WARNING:




Electrical Danger



Turn Power Off

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 4-Candelabra Base Bulb
40 Watts recommended 60 Watts Max.

USE LED BULBS FOR EXTENDED USE

The fixture is Dry rated

HOW TO INSTALL:

Place the fixture parts on a soft cloth-covered platform before installation of fixture.

1. Install the mounting bar onto the outlet box.
2. Decide the desired hanging height and adjust the chain to the correct length.
3. Raise the fixture up and do the wire connection. Attach the canopy over the mounting bar and secure with thread and nut.
4. Insert the connector in between the bottom of arm. Secure it with ball nuts.
5. Place the candle sleeve and bobèche over the socket.
6. Dress the crystals as illustrated.

Crystal Sets

- A. 20 Sets. (1)14mm + (1)63mm
B. 1 Piece. (3)14mm + AS8-30mm

⚠ WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.p65warnings.ca.gov

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

ASSEMBLY INSTRUCTION MODEL #50140SCLMWP

Part Number

Part Numbers

- A. (2)-Wire Connector
- B. (1)-Mounting bar
- C. (2)-Mounting Screw
- D. (1)-Thread and nut
- E. (1)-Canopy (W5 3/4"xH1 1/4")-XSN5010OSCAN5.75IN
- F. (1)-Collar Loop & ring
- G. (1)-Chain (3.8mmx72")-XSN5013OSCHA3.8MM
- H. (1)-Fixture Loop-XSN5013OSLOOP
- I. (1)-Frame
- J. (4)-Metal candle sleeve;H2.17"-XSN5011OSMCDL2IN
- K. (4)-White plastic candle sleeve-XSN5011OSPCDL2IN
- L. (4)-Holder
- M. (4)-Bobeche ; Ø3 1/8"-XSN5011OSBOB3IN
- N. (4)-Arm
- O. (20)-Eyelet-XSU5011OSEYE
- P. (1)-Connector
- Q. (4)-Ball nut

